

RP337S Two-color Receipt Printer



- **Two-color printing enhances the visual hierarchy and makes key information clearly visible**

Supporting dual-color thermal printing to improve information readability and highlight key information, reducing errors caused by visual oversight and improving work accuracy. Dual-color printing makes orders more design-oriented, enhances brand image, and enriches order diversity.

- **Waterproof, insect-proof and oil resistant design, more suitable for kitchen use**


Equipped with a water proof cover to prevent cockroaches and ants from invading and avoid oil mist blockage, it reduces the risk of equipment being contaminated by oil and water stains in the kitchen environment. Improving work efficiency and extending the service life of the equipment.

- **Ring light alarm design, built-in sound cavity design, support incoming order reminder**

Designed specifically for noisy kitchens, it features an eye-catching ring-shaped light and a built-in sound chamber with a volume >90db. It is also equipped with an incoming order reminder function and a paper removal detection function to reduce the risk of missed or wrong orders and improve the accuracy of back-kitchen work.

- **Supports dual placement modes: flat or wall-mounted, suitable for use in more scenarios**

It supports both flat placement and wall-mounted placement, and can easily cope with various kitchen environments to meet different usage needs; it is equipped with an automatic cutter and high-speed printing, and can print quickly after receiving the order, without the need to tear the paper manually, thus avoiding damage to the document caused by tearing the paper.

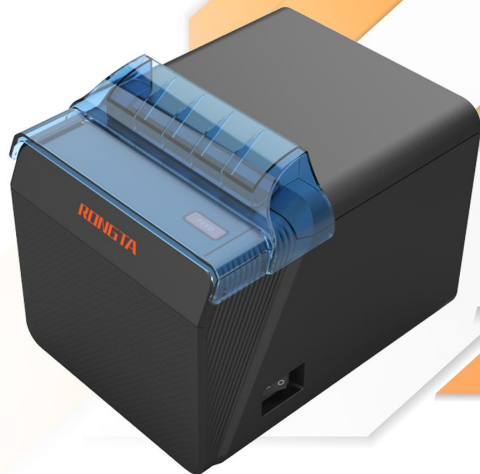

Application Scenario



Logistics



Retail



Catering



Warehousing

RONGTA TECHNOLOGY (XIAMEN) GROUP CO., LTD.
Factory: No. 88 Tonghui South Road, Tong'an District,
Xiamen, Fujian, China.

Tel : 400-800-0596
E-mail : sales@rongtatech.com
www.rongtatech.com



**RONGTA****RP337S Two-color Receipt Printer Parameters:**

Print	Printing method	Direct thermal
	Print Mode	Supports normal printing and two-color printing
	Print width	72mm or 48mm (compatible with 58 paper)
	Resolution	203dpi
	Print speed	Normal printing mode: 200mm/s MAX Dual-color printing mode: 100mm/s MAX
	Print life	50 km
	Cutter life	1.5 million times
Paper specifications	Supported paper types	Ordinary thermal paper and two-color thermal continuous paper
	Paper width	80mm (compatible with 58 paper)
	Paper Depot Width	79.5±0.5mm
	Paper roll outer diameter	82mm
	Paper tearing method	Φ80mm
Button	Power button	Rocker switch
	FEED key	Button paper feed
	Open cover key	Side pressure to open the cover
Detection	Opening detection	support
	Paper Detection	support
	Paper removal detection	support
Wall Mount	Wall mounting function	support
Indicator lights	Power indicator light (blue)	Steady blue: The power supply is normal and the printer is normal.
	Status indicator (red)	Red light flashes: The printer is in abnormal state
	Sound and light prompts	Ring light flashing
Power supply	adapter	Desktop 24V 2.5A
Printer Commands	instruction	ESC/POS
System Support	Print Driver	XP/Win7/Win8/Win10/Win11/Linux CUPS/MacOS/OPOS
Two-color matching software	Two-color editing tool	LabelDesigner editing software
	Print SDK	Android, IOS, Windows
Barcode	One-dimensional code	UPC-A/UPC-E/JAN8(EAN8)/JAN13(EAN13)/CODE 39/CODE93/CODE128/ITF/CODABAR
	QR code	PDF417, QR code
Communication interface		Ethernet+Serial + USB (Type-B)
Main control board	RAM	8MB
	FLASH	8MB
Language	Fonts	4M,GB18030
	Chinese	Simplified Chinese, 24x24dots
	codepage	48
	ASCII/English	FontA 12x24, FontB 9x17
	Other languages	Traditional Chinese, Korean, Japanese, English, etc. can be customized and expanded
Function	Paper saving function	Supports header margin adjustment, line spacing, receipt width, and barcode height adjustment
	Beep reminder	support
Size		180×140×134.6mm(L×W×H)
Environment	Work environment	Working temperature: 0℃~45℃ Working humidity (no condensation): 10%~90%Rh
	Storage environment	Storage temperature: -20℃~60℃ Storage humidity: 10%~90%
Kitchen version	Conformal coating	yes
	Sound and light alarm	support
	IP Rating	IP42 waterproof and dustproof design

* All configurations and parameters listed on this page are subject to actual product and change without notice..